

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 May 2005 (12.05.2005)


PCT

(10) International Publication Number
WO 2005/043954 A2

- (51) International Patent Classification⁷: **H05B** (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/US2004/036046
- (22) International Filing Date: 29 October 2004 (29.10.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/516,381 31 October 2003 (31.10.2003) US
- (71) Applicant: **PHOSEON TECHNOLOGY, INC.** [US/US]; 14974 N.W. Greenbrier Parkway, Beaverton, OR 97006 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BEDSON, Jon, R.** [US/US]; 12425 nw BARNES ROAD #49, Portland, OR 97229 (US). **MCNEIL, Thomas, R.** [US/US]; 5410 N.W. Edgebrook Place, Portland, OR 97229 (US). **OWEN, Mark, D.** [US/US]; 16075 N.W. Telshire Drive, Beaverton, OR 97006 (US).
- (74) Agent: **WOLFE, James, L.**; Ganz Law, P.C., P.O. Box 2200, Hillsboro, OR 97123 (US).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BF, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: SERIES WIRING OF HIGHLY RELIABLE LIGHT SOURCES

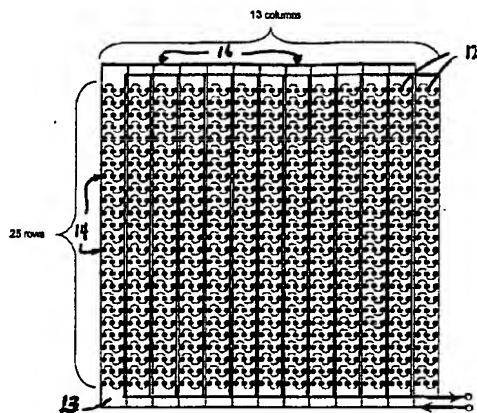

(57) Abstract: The light array of this invention includes a number of columns and rows of LED's connected in a series/parallel combination. The series parallel combinations effectively optimize the impedance, accommodate failure rate, facilitate light mixing, provide a means of imbedding redundancy, and common cathodes or anodes. This arrangement provides a superior light source for consumer, industrial and specialty markets in respect to mean time between failure, process control, radiant intensity, wavelength mixing, power requirements and other characteristics of the light source. Each column includes a number of rows of plural LED's. The LED's in each row are wired in series and each column is wired in parallel so that if one LED fails only the LED's connected in series with the failed LED will also fail. There is redundancy in the circuit as well as the arrays so that if there are failures different current carrying elements or different series LEDS will automatically be powered on. The array may be connected in series with one or more LED arrays to form a module. Multiple modules may be connected in series with other multiple modules.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SERIES WIRING OF HIGHLY RELIABLE LIGHT SOURCES

Inventors: Jon R. Bedson, Tom McNeil and Mark D. Owen

5 This invention claims the benefit of co-pending U.S. Provisional Application No. 60/516,381, entitled "Series Wiring of Highly Reliable Light Sources," filed October 31, 2003, the entire disclosure of which is hereby incorporated by reference as if set forth in its entirety for all purposes.

Background of the Invention

10 Solid state lighting devices such as, for example, light emitting diodes (LED's) are used for a number of applications. One type of such solid state lighting device is disclosed in International Patent Application No. PCT/US03/14625, filed May 28, 2003, entitled High Efficiency Solid-State Light Source And Methods Of Use And Manufacture, the details of which are hereby incorporated by reference.

15 There are numerous applications where a long string of devices, such as, for example, LED's, need to be connected electrically. Such strings present unique problems for the electrical engineer. On the one hand, there is a desire to string the components in series so that the current from one component flows directly through the next component. This is a desired configuration because it minimizes the amount of electrical current
20 required while increasing the total voltage required across all the components. Since high currents are more difficult to deal with because high currents require large gauge wires, for example, it is desired to have lower currents and higher voltages.

However, stringing the components together in series presents a problem because if one of the components in the string fails, it will result in the failure of the entire string. For example, in a string of holiday lights wired in series, if one light fails the entire string also fails. To overcome this problem, holiday string lights are typically wired in parallel
5 so that when one light fails the rest of the lights in the string continue to operate. However, such wiring requires higher current and lower voltage.

Wiring lights in series is preferred because the total current is lower and the operating voltage is higher. This presents a problem because if one light fails all lights in the series fail. Wiring lights in parallel overcomes this problem because when one light
10 fails all other lights still operate. However, one undesirable aspect of wiring in parallel is that the total current is higher and the operating voltage is lower.

One prior art approach to this problem is described in U.S. Pat. No. 6,153,980 (Marshall et al). This patent describes a circuit that has individual sensors for each light source and can determine if any given light source has failed. In the event of failure, the
15 circuit shunts current around the failed component so that the rest of the components that are wired in series continue to receive electrical current. While such a circuit solves the problem of allowing serial connection (and, thus, higher voltage and lower current) the circuit itself is more complicated, expensive, and prone to possible failure, which defeats its intended purpose.

20 What is needed is a light source that never fails or that at least has such a high reliability and mean time between failures that failure is something that effectively can never happen. Thus, the preferred solution changes from parallel wiring to series wiring

forming a cascading series parallel circuit substantially reducing failures and mean time between failures. The parallel/series circuitry enables the selection of current and potentials that can accommodate the specific performance of solid state light sources in addition to complying with industry standards for different markets. These markets can
5 be, but are not limited to industrial (high power), consumer (low power) and specialty markets as in the case of aerospace and medical markets.

Summary of the Invention

The present invention provides a light source that is composed of an array of
10 devices having a very large mean lifetime. The array is wired in a combination series and parallel circuit that ensures that the composite device will virtually never burn out. The light sources in the array of this invention are wired together in series without concern of the consequences of a module failure.

The array of this invention may include a composite of LED's that may number in
15 the hundreds or about one thousand, for example. LED's are solid-state light sources with very long lifetimes that are measured in hundreds of thousands of hours. The array of this invention capitalizes on the lifetime of the LED's but also capitalizes on their low operating current and voltage to produce a composite array that is partly parallel and partly in series.

20 The light array of this invention includes a number of columns and rows of LED's. Each column includes a number of rows of plural LED's. The LED's in each row are wired in series and each column is wired in parallel so that if one LED fails only

the LED's connected in series with the failed LED will also fail. The array may be connected in series with one or more LED arrays.

Another advantage of the present invention is that connecting the LED's in series provides all of the LED's in the series with the same amount of current so that the LED's
5 have the same brightness.

This invention provides a lighting module comprising an array of LED's consisting of plural columns and rows, wherein each row of LED's in each column is connected in series and each column is connected in parallel. The LED array may be connected in series to one or more LED arrays. Each column in the LED array may
10 contain at least one row of, for example, three LED's. Each column in the LED array may contain, for example, twenty-five rows of LED's. The LED array may contain, for example, thirteen columns.

This invention also provides novel circuits for driving LED's. In one embodiment, a circuit is provided that results in a high LED peak intensity without
15 requiring more power input. In another embodiment, a circuit is provided for pulsing an array of LED's that results in very high current levels in the LED's without causing over-dissipation.

These and other embodiments are described in more detail in the following detailed descriptions and the figures. The foregoing is not intended to be an exhaustive
20 list of embodiments and features of the present invention. Persons skilled in the art are capable of appreciating other embodiments and features from the following detailed description in conjunction with the drawings.

Brief Description of the Drawings

Figure 1 shows an array of LED's that are wired both in series and in parallel.

Figure 2 shows a module of plural arrays of LED's wired together.

5 Figure 3 shows a full-wave bridge rectifier for directly driving a single string of LED's of Figs. 1 and 2.

Figure 4 shows a circuit for pulsing an array of LED's as shown in Figs. 1 and 2.

Detailed Description of the Invention

Representative embodiments of the present invention are shown in Fig. 1, wherein
10 similar features share common reference numerals.

As shown in Fig. 1, an LED array 10 is shown that is wired in a series/parallel combination. The LED array 10 includes a plurality of individual LED's 12 mounted on a substrate 13 and arranged in rows 14 and columns 16. Each column 16 includes plural rows 14 of LED's 12 with, for example, three LED's 12 in each row 14. There may be,
15 for example, twenty-five rows 14 in each column 16. The LED's 12 in each row 14 are wired in series and each column 16 is wired in parallel. Since the LED's 12 in each row 14 are wired in series it is ensured that if one LED 12 fails only the other LED's 12 in that series will fail also. The loss the LED's 12 in a single row 14 in the total array 10 has only a minimal impact on the total brightness of the array 10 since it consists of many
20 LED's 12.

In this example, the total voltage required to drive the LED array 10 is roughly three times the forward voltage drop across any given LED 12. The total current required

to drive the LED array 10 is $13 \cdot 25 \cdot X_{mA}$, where 13 is the number of columns 16 for each array 10, 25 is the number of rows 14 of LED's 12, and X_{mA} is the nominal drive current required for each LED 12. For example, the LED 12 might have a nominal forward current of 20 mA at a forward voltage of between 3.6 and 4.0 volts. For example, the
5 voltage and current for driving a single board populated with these LED's 12 may be $13 \cdot 25 \cdot 0.020A = 6.5A$ and between 10.8 – 12 volts.

If all of the LED's 12 were wired in parallel, the required current would be three times higher, and the voltage three times lower. The configuration of Fig. 1 provides an improvement in offering considerably lower current at higher voltage while at the same
10 time producing an LED array 10 that has a virtually unlimited lifetime.

Each LED array 10 may be wired, preferably, in series to one or more other LED arrays to form a module as seen in Fig. 2. Multiple modules may be wired, preferably, in series to other multiple modules. However, because of the virtually unlimited lifetime of the LED array 10 the modules may be wired in parallel or in series without regard for
15 concerns that one of the LED arrays might fail causing failure of the whole module.

For example, one might want ten LED arrays 10. Wiring them in series requires (using the numbers from the above example) 6.5 amps at about 120 volts. This is roughly the electrical requirement of a domestic vacuum cleaner. By comparison, if the ten LED arrays were operated in parallel they would require 65 amps at about 12 volts, which is
20 roughly the requirements of a light-duty arc welder. So, when wired in series the electrical requirements are far more tractable than when wired in parallel.

Thus, wiring in series results in lower current and higher voltage requirements. These requirements are more easily (cheaply and inexpensively) met by power supplies than having to provide higher current and lower voltage. However, as discussed above, series connections result in the entire string failing when any single component fails.

5 This is such a significant disadvantage that in almost all cases the wiring is done in parallel and the consequent cost in high current and low voltage is simply absorbed by the consumer.

With the LED array of this invention, a light source is provided that is made of distributed devices having lifetimes of hundreds of thousands of hours. The array 10

10 itself is wired in a parallel/series combination that ensures that if one LED 12 fails, at most only two others fail with it, as shown in this example. This is a minor problem for an array with hundreds of LED's 12. Except for row 14 of LED's 12 wired in series, the columns 16 of LED's are wired in parallel, ensuring that the LED array 10 can virtually never fail. It is this extreme reliability that allows multiple LED arrays 10 to be strung

15 together in series without regard for failure in any given array.

The number of rows 14, columns 16, and number of LED's 12 in each row 14 may vary depending on a number of factors such as, for example, the size of the array substrate.

Figure 3 shows a full-wave bridge rectifier for directly driving a single string of

20 LED's as shown in Figs. 1 and 2. A resistor may be used to provide a limit on current. One novel feature of this circuit is that no filter capacitor is used. The LED string conducts only on the peaks of the pulsating-DC output of the rectifier. The LED current

may be high, which may have an operational advantage in high peak light output, particularly for chemical processes. However, the duty cycle is limited. The result is a high LED peak intensity for the same power input. It is known that the human eye responds to the peak intensity of a light source. The scheme of Fig. 3 results in a visible
5 light source of higher apparent brightness for a given power dissipation.

Figure 4 shows a novel scheme for pulsing an array of LED's as shown in Figs. 1 and 2. In this scheme, an AC-DC supply (shown here as an off-line rectifier) is used to charge a low-ESR (equivalent series resistance) capacitor to a voltage much higher than the low-current operating voltage of the LED. A string of LED's is placed in series with
10 a high-current MOSFET switch across this capacitor. If the MOSFET is switched to "ON" at a duty cycle equal to or lower than 5%, it is possible to create very high current levels in the LED's without causing over dissipation. Since the LED output is proportional to current in the LED, the resulting peak optical output of the LED is many times its DC value. This can have advantages both in visible and chemical systems
15 applications.

An LED can be electrically modeled as a diode with a series resistance. Pulsing the LED in the manner described overcomes the series resistance and allows the current in the LED to be determined by the usual diode equation:

$$I = I_s \exp (V/kt),$$

20 where I is the current in the LED, I_s is the saturation current, V is the voltage applied across the diode junction (not the LED), k is the Boltzman constant, and t is the absolute temperature.

It can be shown that very high currents are possible in an LED junction if the series resistance can be overcome by high-voltage pulsing means. Voltages across individual LED's can be in excess of 20 volts for a 3-volt junction voltage. The actual construction of the individual LED will determine how high the applied voltage can be before voltage breakdown occurs. As such, voltages considerably higher than a typical 3.3 volts may be applied to drive the LED's. Individual LED's may be pulsed with voltages of between 6-50 volts. However, voltages up to 150 volts may be applied to the LED's. It is also possible with this invention to pulse at least one LED up to 1,000 times its DC current value.

Persons skilled in the art will recognize that many modifications and variations are possible in the details, materials, and arrangements of the parts and actions which have been described and illustrated in order to explain the nature of this invention and that such modifications and variations do not depart from the spirit and scope of the teachings and claims contained therein.

While the inventor understands that claims are not a necessary component of a provisional patent application, and therefore has not included detailed claims, the inventor reserves the right to claim, without limitation, at least the following subject matter.

WHAT IS CLAIMED:

1. A lighting device, comprising,
an array of LED's consisting of plural columns and rows, wherein each row of
5 LED's in each column is connected in series and each column is connected in
parallel.
2. The lighting device of claim 1, wherein the LED array is connected in series to
one or more LED arrays to form a module.
3. The lighting device of claim 1, wherein each column in the LED array contains at
10 least one row of one or more LED's.
4. The lighting device of claim 3, wherein each column in the LED array contains at
least two or more rows of LED's.
5. The lighting device of claim 4, wherein the LED array contains at least two or
more columns.
- 15 6. The lighting device of claim 1, wherein the LED's connected in series are
supplied with the same amount of current so that each LED emits the same
brightness.
7. The lighting device of claim 1, wherein each of the two or more LED's in each
column is also supplied with the same amount of current so that each column emits
20 the same brightness.
8. The lighting device 3, wherein each module is connected in series to one or more
modules.

9. The lighting device 3, wherein each module is connected in parallel to one or more modules.
10. A method of making a lighting device, comprising,
providing an array of LED's consisting of plural columns and rows,
5 wiring each row of LED's in each column in series, and
wiring each column in parallel.
11. The method of claim 10, comprising,
connecting the LED array in series or parallel to one or more LED arrays
to form a module.
- 10 12. The method of claim 10, comprising,
providing the LED's connected in series with the same amount of current
so that each LED emits the same brightness.
13. The method of claim 10, comprising,
providing the LED's connected in parallel with the same amount of
15 current so that each LED emits the same brightness.
14. The lighting device of claim 1, wherein the LED's are driven by a full-wave bridge rectifier circuit.
15. The lighting device of claim 1, wherein the LED's are driven by a circuit in which
an AC-DC supply is used to charge a low-ESR capacitor to a voltage that is
20 substantially higher than the low-current operating voltage of the LED.
16. The lighting device of claim 15, wherein a string of LED's is placed in series with
a high-current MOSFET switch across the capacitor.

17. The method of claim 10, wherein the LED's are driven by a full-wave bridge rectifier circuit.

18. The method of claim 10, wherein the LED's are driven by a circuit in which an AC-DC supply is used to charge a low-ESR capacitor to a voltage that is substantially
5 higher than the low-current operating voltage of the LED.

19. The method of claim 18, wherein a string of LED's is placed in series with a high-current MOSFET switch across the capacitor.

10

15

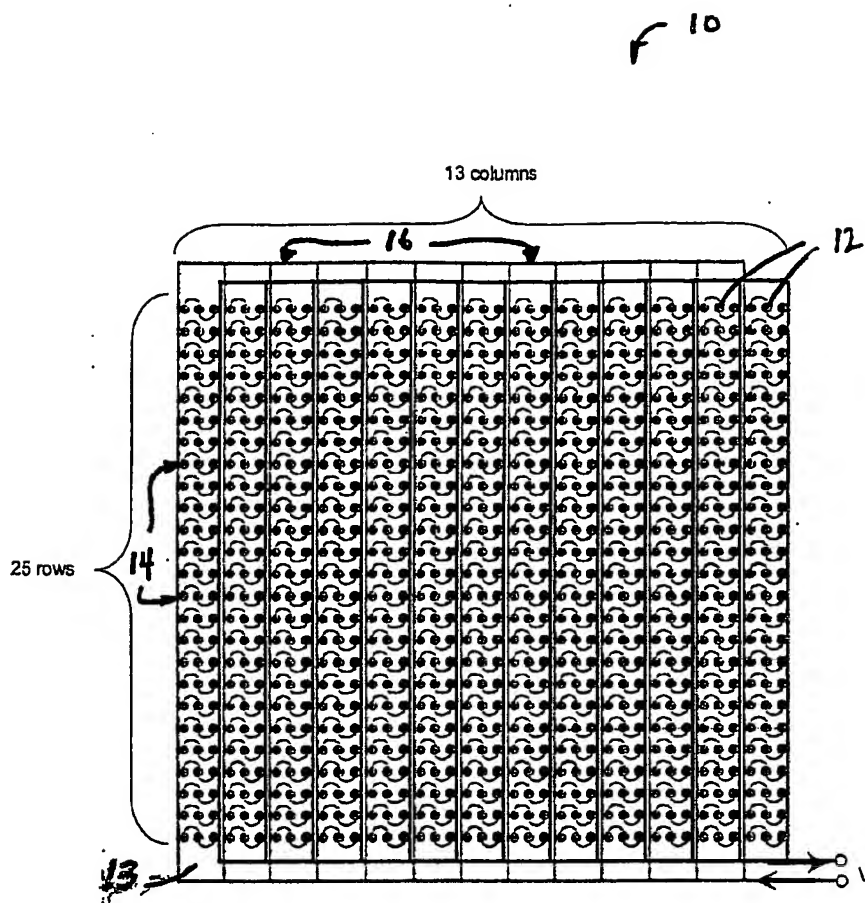
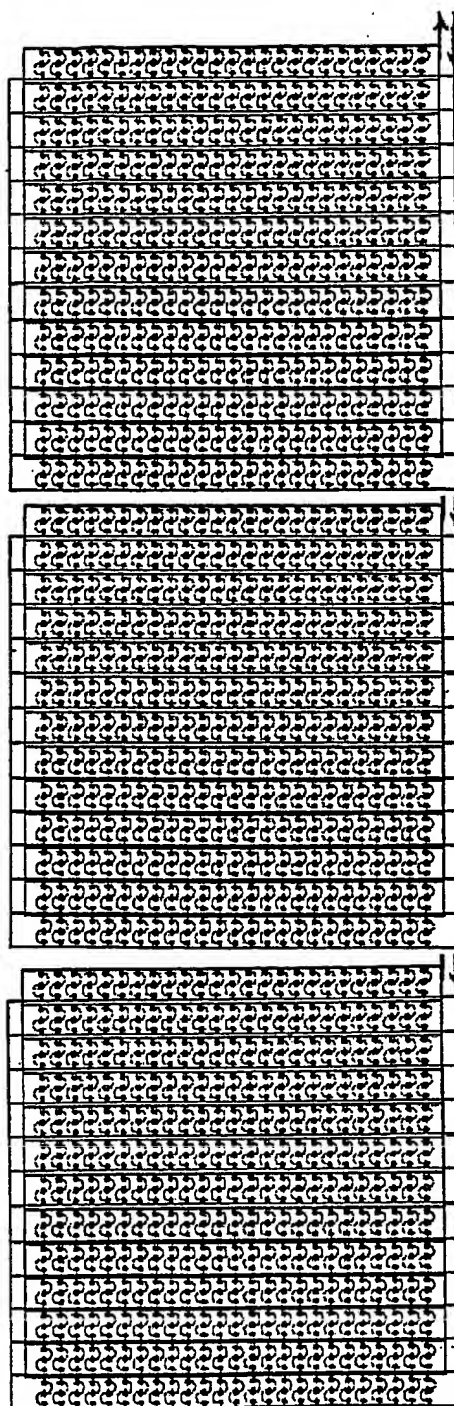


FIG. 1

FIG. 2



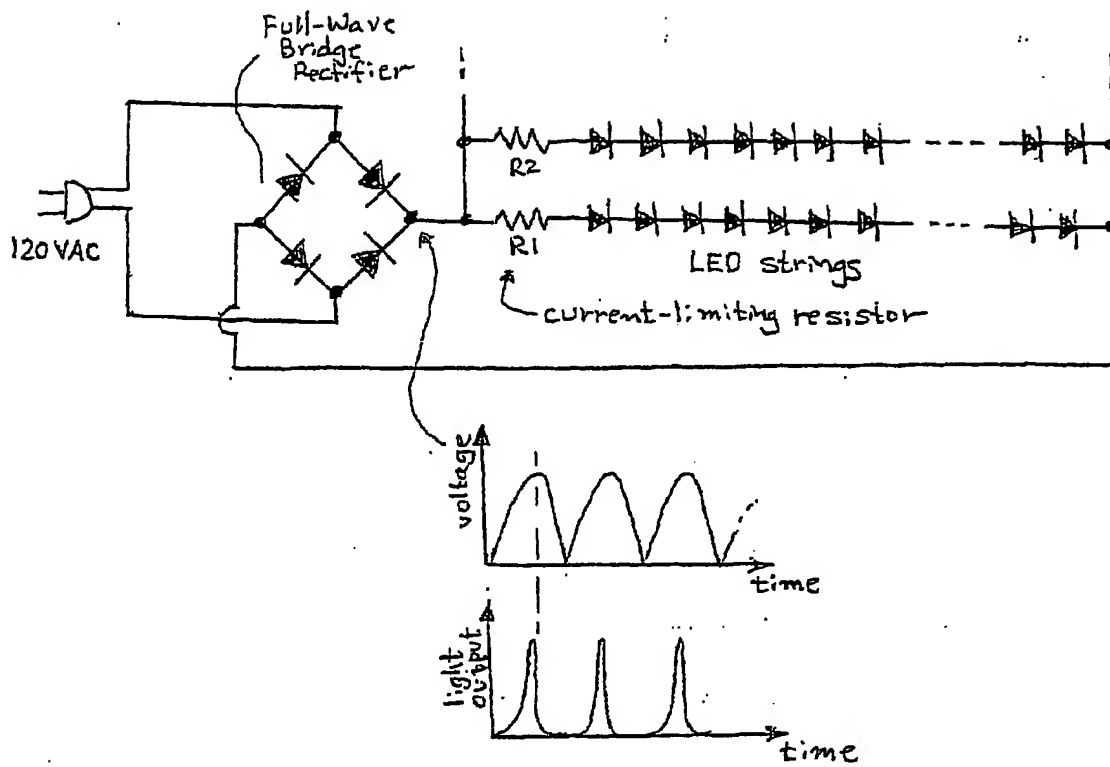


FIG. 3

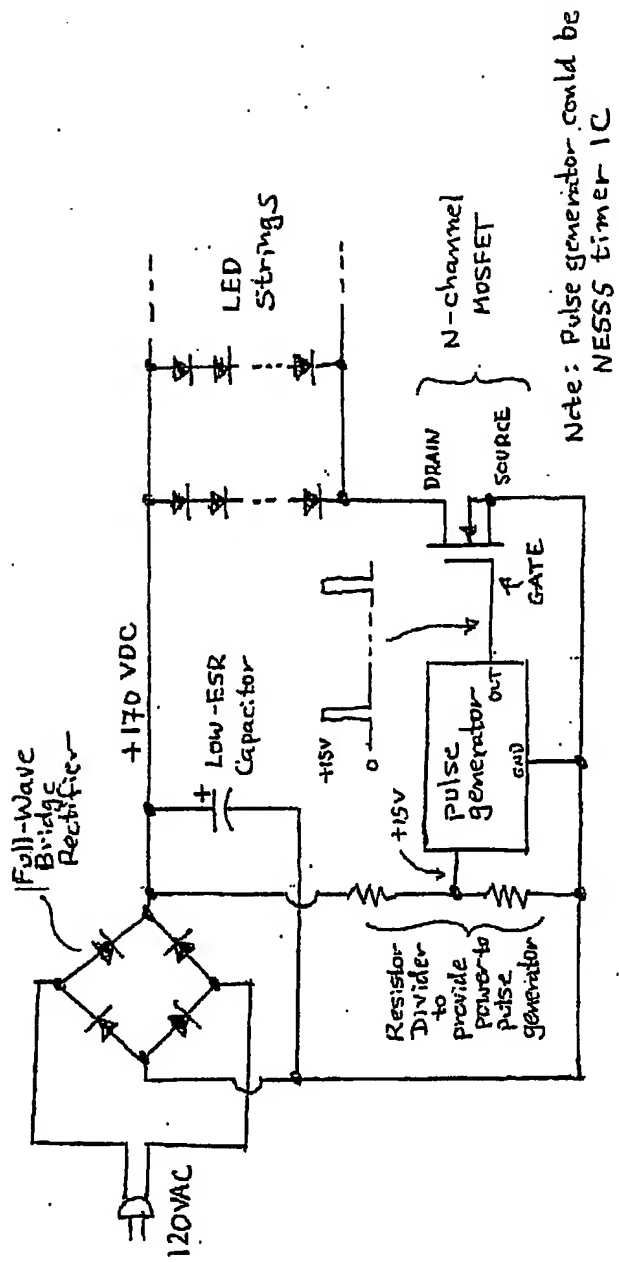


FIG. 4